

ALPTECH INTERNATIONAL C/O MENGI ENGINEERING COMPANY


Address: Plot No. A/232, Road No. 21, 'Y' Lane, Wagle Estate,Thane-400 604. INDIA. | **Telephone No.:** +91 9769976747 / 22-25823203
Email.: alptechinternational@gmail.com | **Web.:** www.alptechindia.com | **PAN NO.:** AARCA9816A

FAZER 500 GE UPSTROKE SAW 5 METERS

CUTTING SAW / DOUBLE HEAD CUTTING MACHINE

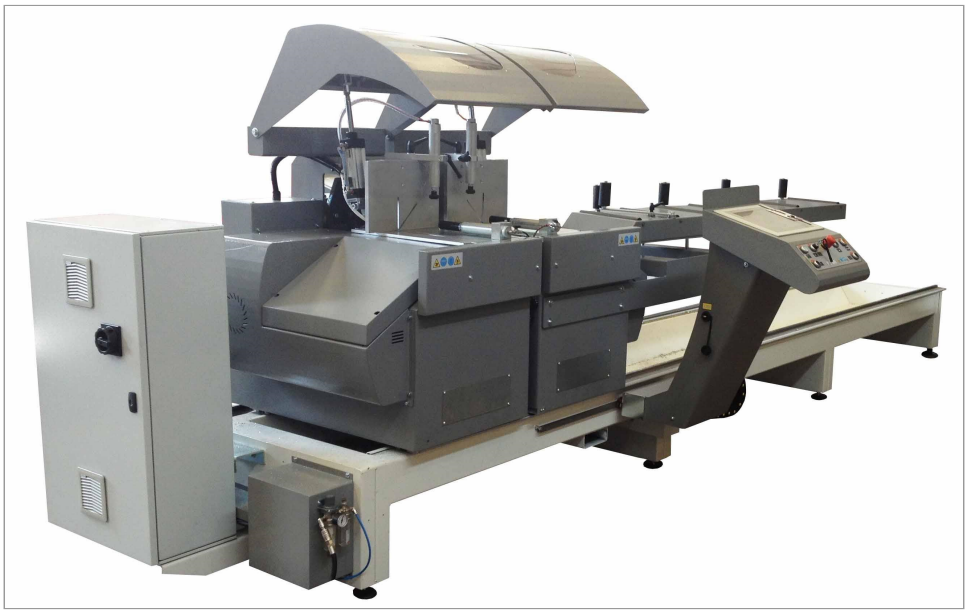

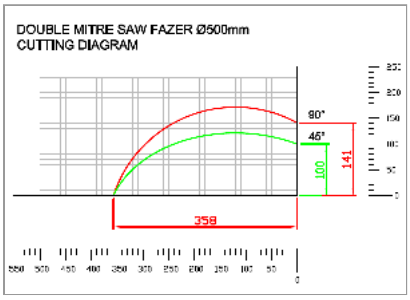

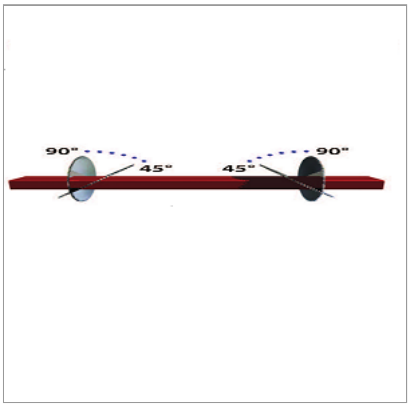

Sale Office: Office No 9 Gound Floor Sakhi House, Trombay Road, Chembur East, Mumbai - 400071. | **Warehouse:** Gala No 9, A 6 Block, Padmini Complex Off Kalher Naka, Bhiwandi. | **Telephone No.:** 91 9769976747 | **Email:** audatechindia@gmail.com

ALPTECH INTERNATIONAL C/O MENGI ENGINEERING COMPANY
Address: Plot No. A/232, Road No. 21, 'Y' Lane, Wagle Estate,Thane-400 604. INDIA. | **Telephone No.:** +91 9769976747 / 22-25823203
Email.: alptechinternational@gmail.com | **Web.:** www.alptechindia.com | **PAN NO.:** AARCA9816A

Description:

TECHNICAL SPECIFICATION Double head cutting off machine with rising blades for mitre cuts. With fixed unit on the left side and motorized movable unit on the right side. - Pneumatic tilting range inwards 90/45. Equipped with double action vertical clamps, full protection of

- of the saw blades, movable side support 2.5mts, pneumatic spray mist lubrication, complete with 2x TCT Saw Blades Ø 500 mm.
- Motors 2.2 kW each.
- Standard length 4 meters.

Product Code: PRO-15

Country: Italian

HSN Code: 84615029

Unit: 0

Gross Weight: 1780KG

Net Weight: 1750KG

Dimension: L6920*W1930*H1450

Specification:

TECHNICAL DATA Upward blade rising - 3 HP 2.2 kW three phase motors - Blade speed 2800 rpm - Blade tilting from 90 to 45 inwards - Intermediate angles obtained through mechanical stops - Mobile carriage movement through brushless motor - Max mobile carriage spee20 MM

Hydropneumatic adjustable blades rising

- 2.5 m mobile head conveyor

- Min cutting length between the two heads: 420 mm (with heads at 90°)

- Max cutting length between the two heads: 4850 mm (with heads at 90°)

EQUIPPED WITH ELECTRONIC POSITIONER TS7002 12" ABLE TO: -

Manage single cuts

- Memorize 99 profile codes and their values

- Memorize cutting list already calculated via USB

- Manage over-size and under-size cut

- Use profile drawings for easier operations

STANDARD EQUIPMENT:

Vertical and horizontal clamps, 1 per head

- Cutting area completely protected, pneumatic covers - Pneumatic mist spray

- Movable roller side support

- Air gun

- TCT Saw blade Ø500 mm